

High performance
and reliability
for your fuel
station.



Durable and Reliable




With our Long life hydraulic systems, your customers can rely on your fuel station for reliable refuelling with a great uptime experience.

Multimedia Module



Eurostar Fuel Dispensers have option to come with multimedia module. This will help you for promotions, information and advertisements.

Eurostar MP fuel dispensers are Europump's High Tower ('H') style, multiproduct dispenser with 'hanging hose'. Design of dispenser aimed to be durable, simple and easy to use.

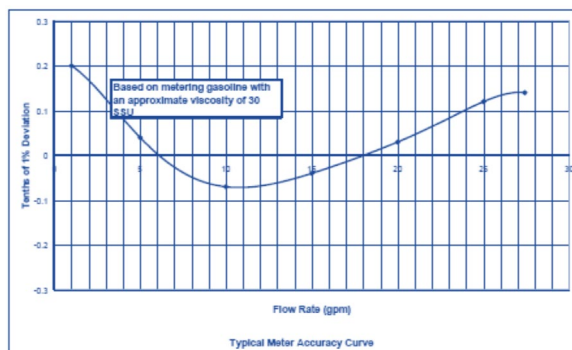

Europump has special agreement to able to use original hydraulic components of Bennett USA who is known as quality dedicated company.



Main Features :


- Electrostatic Painted Galvanize or Stainless-Steel Frame options.
- Optional color or branding options.
- Various configuration options from 1 grade-1 nozzle to 4 grades-8 nozzles.
- High Accurate Meter with Calibration option
- Preset filling via buttons or keypads
- Various flow rate options 45, 70 or 120 lt/min.
- Designed according to OIML, ATEX and MID

Optional Addons :

- SDCard Logger
- Receipt Printer
- Self service and Card Payment Module
- Multimedia Module
- RFID Reader
- ATC Module

Models and Dimension

#	MODEL	Product	Nozzle	Display	Built-in Suction Pump	Dimensions
1	EUROSTAR ET 48-MP/2	4	8	2	+	45x132x244 cm
2	EUROSTAR DT 48-MP/2	4	8	2	-	45x132x244 cm
3	EUROSTAR ET 36-MP/2	3	6	2	+	45x132x244 cm
4	EUROSTAR DT 36-MP/2	3	6	2	-	45x132x244 cm
5	EUROSTAR ET 24-MP/4	2	4	4	+	45x95x244 cm
6	EUROSTAR DT 24-MP/4	2	4	4	-	45x95x244 cm
7	EUROSTAR ET 24-MP/2	2	4	2	+	45x95x244 cm
8	EUROSTAR DT 24-MP/2	2	4	2	-	45x95x244 cm
9	EUROSTAR ET 22-MP/2	2	2	2	+	45x95x244 cm
10	EUROSTAR DT 22-MP/2	2	2	2	-	45x95x244 cm
11	EUROSTAR ET 12-MP/2	1	2	2	+	45x95x244 cm
12	EUROSTAR DT 12-MP/2	1	2	2	-	45x95x244 cm

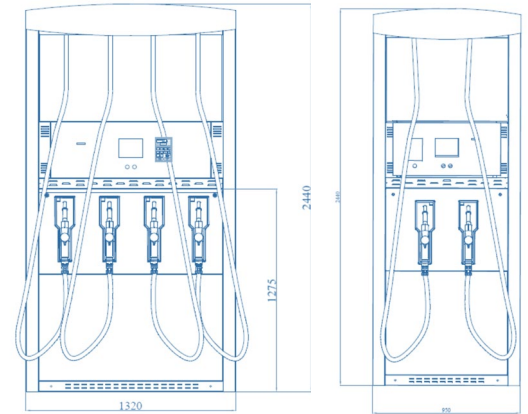

Technical specifications:

Number of Products	1 - 4
Nozzle	1 - 8
Products	Diesel, Benzine LPG (For Combo Dispensers)
Flow Rate	50 Liter/Min. 70 Liter/Min. 120 Liter/Min.
Simultaneous Filling	2 or 4
Flow Meter	Positive Displacement Meter with Four Pistone
Measuring Accuracy	± %0.25
Pump	Gear Type Pump with Internal Bypass Valve
Pump Motor	380v 0.75 kW Ex-proof Motor
Display	Backlighted Module Display 6 Digit Total Amount 6 Digit Liter 4 Digit Unit Price

Electronic CPU	RS232, RS485 or Current Loop Dart Protocol
Electronic Options	SDCard, Printer, Cash Acceptor, Card Reader Multimedia Screen 10 Digits
Electronic Totalizer	7 Digits
Electro-mechanic Totalizer	7 Digits
Keyboard	2x16 Information LCD 16 Button membran keypad
Pulsar	5V Dc 2x50 or 2x100 Pulse
Solenoid Valve	Ex-Proof Solenoid Valve 1" or 3/4"
Calibration Options	Electronic or Mechanic
Hose	5/8" , 3/4" or 1" Hose for petroleum
Nozzle	3/4" or 1" Automatic Fuel Nozzle
Swivel	Z or Stright Type Swivel
Directive and Norms	ATEX, MID, OIML and ISO9001

Contact Us:

Europump Italia SRL

Via Privata Geoges Bizet, 36/G, 20092
Cinisello Balsamo MI ITALY
Phone : +39 02 612 99144 Fax: +39 02 407 05784
E-Mail : italy@europump.com


Europump Polska sp. z o. o.

ul. Rapackiego 37 86-300 Grudziądz POLAND
Phone: +48 56 64 11 666 Fax: +48 56 64 11 665
E-Mail : poland@europump.com

Europump Aky.LPG.Pmp.Paz.San. ve Tic. Ltd.Sti.

Ist. Mermerciler San. Sit. 18C 22S B32 41480
Dilovasi/Kocaeli TURKEY
Phone: +90 216 365 35 70 Fax: +90 216 365 35 72
E-Mail : turkey@europump.com

www.europump.com

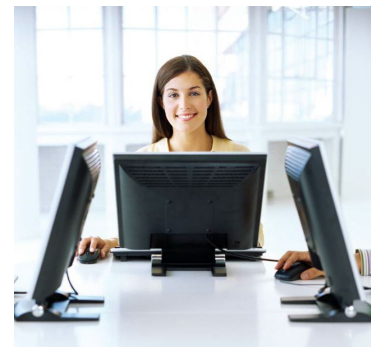

NEED MORE INFORMATION?

For more information on any of
our products or services please
visit us on the Web at:
www.europump.com

